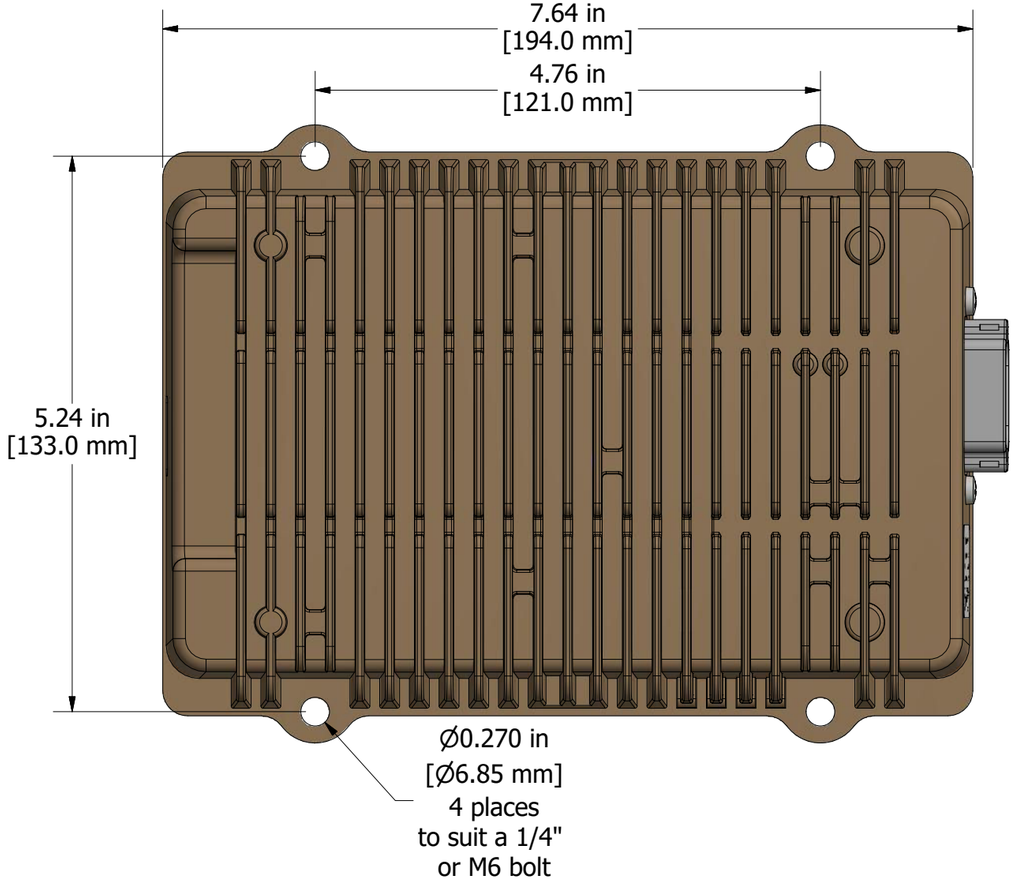

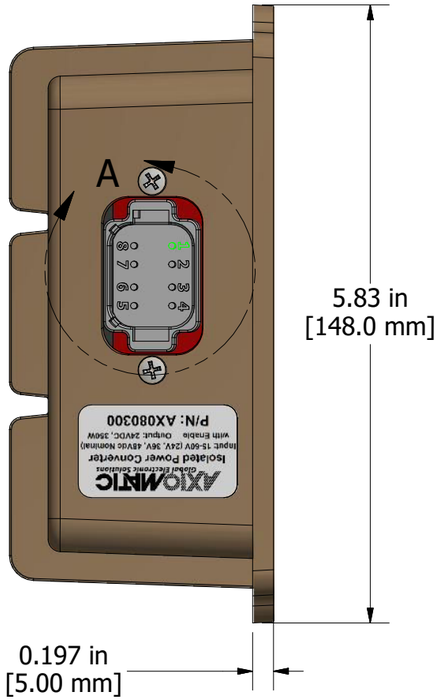

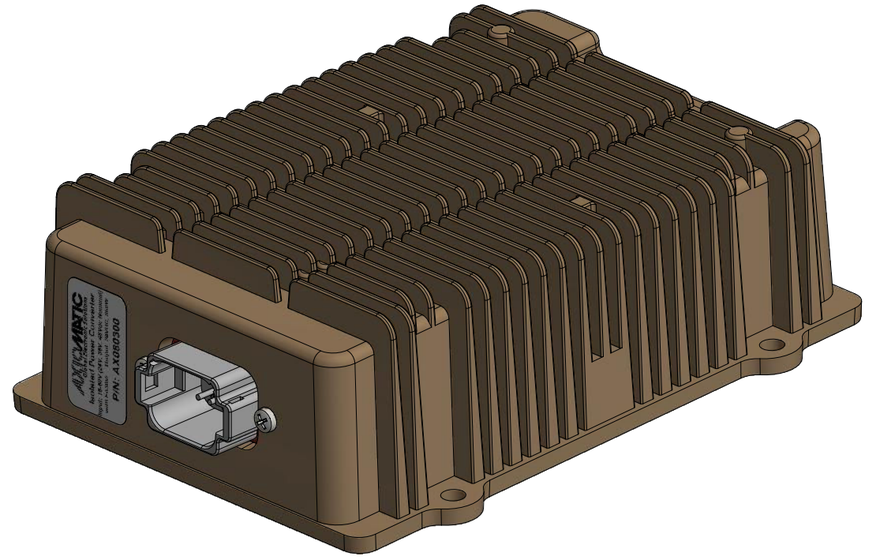

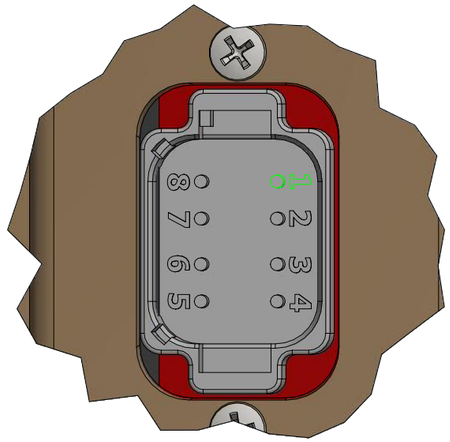

DETAIL A
AT13-08PA
mates with DT06/AT06-8SA
all variations

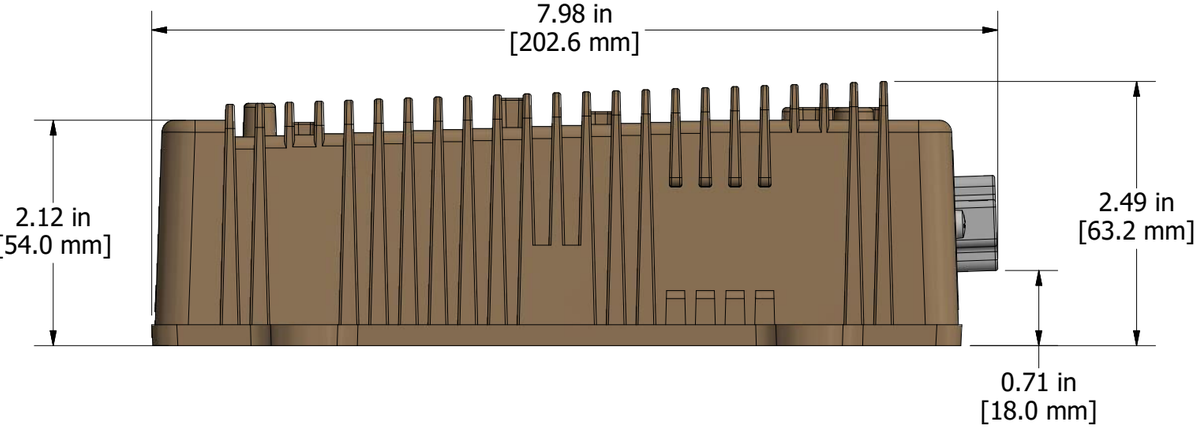

AXIOMATIC
Global Electronic Solutions

Isolated Power Converter

Input: 15-60V (24V, 36V, 48Vdc Nominal)
with Enable Output: 24VDC, 350W

P/N: AX080300

unit label

DIMENSIONS ARE IN **inches [mm]**		
Unless otherwise noted, tolerances as stated.		
TOLERANCES	**FABRICATION**	**MACHINING/CASTING/ MOLDING**
X.XXX" [X.XX mm]	± 0.015" [0.38 mm]	± 0.005" [0.13 mm]
X.XX" [X.X mm]	± 0.03" [0.7 mm]	± 0.008" [0.2 mm]
X.X" in [X mm]	± 0.06" [1.5 mm]	± 0.03" [0.7 mm]
	ANGLES ± 1.0	ANGLES ± 0.5
		others ISO 2768-2 class K

PROPRIETARY
THE INFORMATION CONTAINED IN THIS DRAWING IS CONFIDENTIAL AND PROPRIETARY AND REMAINS THE EXCLUSIVE PROPERTY OF AXIOMATIC TECHNOLOGIES CORPORATION. THIS DRAWING MAY NOT BE USED, REPRODUCED IN WHOLE OR IN PART, NOR REVEALED TO OTHERS WITHOUT THE PRIOR WRITTEN CONSENT OF AXIOMATIC TECHNOLOGIES CORPORATION. BY ACCEPTANCE OF THIS DRAWING, THE BEARER AGREES TO THE THESE CONDITIONS.

AXIOMATIC TECHNOLOGIES CORPORATION
5915 WALLACE ST.
MISSISSAUGA, ON
CANADA L4Z1Z8
905-602-9270

MATERIAL: ADC12 cast aluminum, PA66 connector	DRAWN: TF	DATE: 2021-10-26	TITLE: 15/60Vdc to 24Vdc Converter, Isolated		
FINISH: MIL-A-8625 type III hard anodize	CHECKED	DATE	DWG REV: D1	DWG NO: AX080300-MD	PART REV: 1
THIRD ANGLE PROJECTION / TOOL: INVENTOR	APPROVED	DATE	SCALE: 0.7	PART NO: AX080300	SHEET: 1 of 1
SIZE: B					